




HIGH PERFORMANCE DIGITAL IMAGING
made easy

QICAM *FAST1394*

High-Performance IEEE 1394 FireWire™ Digital CCD Camera – Monochrome or Color

The QImaging QICAM digital camera is designed for high-resolution, brightfield scientific and industrial applications. A progressive-scan interline CCD sensor gives a resolution of 1.4 million pixels in a 12-bit digital output. High-speed, low-noise electronics provide linear digital data at frame rates up to 110 fps with binning and ROI. The IEEE 1394 FireWire™ digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The QICAM includes QCapture software (Windows® and Mac OS) for real-time image preview and capture. A **Software Development Kit (SDK)** is available upon request for interfacing with custom software.

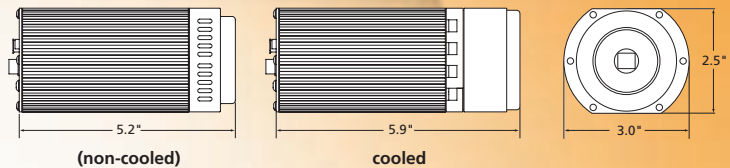

Note: Lenses are shown for illustration only and are not included.

CAMERA MODELS

Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture software, & access to SDK

- **Monochrome QICAM Cooled** Model: QIC-F-M-12-C
- **Monochrome QICAM Non-Cooled** Model: QIC-F-M-12 CCD Digital Camera, 12 Bits
- **Color QICAM Cooled** Model: QIC-F-CLR-12-C
- **Color QICAM Non-Cooled** Model: QIC-F-CLR-12 CCD Digital Camera, 12 Bits

CAMERA OPTIONS

- **RGB Color Filter** for monochrome cameras (F-mount interface required), refer to spec sheet for more details



- **Extended Warranty**

FEATURES

- High-Resolution, 1.4-Million-Pixel Sensor
- High-Speed Readout
- Flexible Exposure Control from 12µs to 17.9min
- 12-Bit Digitization/ 36-Bit Color Digitization
- External Sync & Trigger
- Peltier Cooling
- ROI (Region of Interest)

BENEFITS

- Highly detailed, sharp images
- Previewing & focusing in real time
- 165fps maximum frame rate
- 110fps with 4x4 binning & ROI
- 10fps full resolution
- Ideal for automated imaging applications
- Optimal integration over a wide range of light levels
- 4096 grey levels for precise light-intensity discrimination
- 4096 levels per channel for superior color images
- Tight synchronization with flashlamps, automated filters, shutters, & microscope stages
- Minimizes thermal noise during low-light imaging
- Higher frame rates for precise analysis of rapidly changing specimens
- Increases sensitivity for quantitation & imaging of very low light levels
- Increases frame rate
- Simple connectivity
- Ease of use & installation
- Portability with laptop computer
- Simultaneous use of multiple cameras through a single port
- Single-cable operation (no external power supply or control unit)
- Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming applications

Binning

IEEE 1394 FireWire™ QImaging Fast 1394 Technology


Extensive Third-Party Software Support

QICAM FAST1394 SPECIFICATIONS

APPLICATIONS

- Brightfield and Phase-Contrast Microscopy
- Live-Cell Imaging
- Pathology, Histology, & Cytology
- Motility & Motion Analysis
- DNA Analysis
- Metallurgical Microscopy
- Semiconductor Inspection
- Failure Analysis
- Forensic Analysis

SPECTRAL RESPONSE

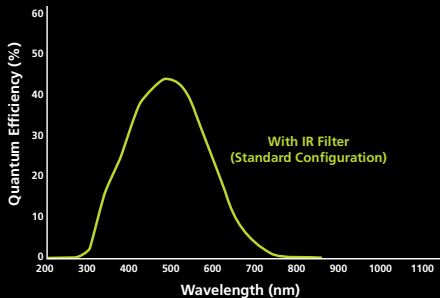

CCD SENSOR

Light-Sensitive Pixels	1.4 million; 1392 x 1040
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	12µs to 17.9min in 1µs increments
Sensor Type	Sony® ICX205 progressive-scan interline CCD (monochrome or color)
Pixel Size	4.65µm x 4.65µm
Linear Full Well	10,000e ⁻
Read Noise	12e ⁻
Cooling Available	Yes (optional)
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5, 2.5MHz
Frame Rate	10fps full resolution @ 12 bits (165fps maximum with binning and ROI)

CAMERA

Computer Platforms/Operating Systems	Windows® & Mac OS**
Digital Interface	IEEE 1394 FireWire™
Sustained Data Rate	40MB/s
Shutter Control	Electronic shutter, no moving parts
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
Gain Control	0.6 to 15x
Offset Control	-2048 to 2047
Optical Interface	1/2", C-mount optical format
Threadmount	1/4" — 20 mount
Power Requirements	7W (non-cooled); 13W (cooled); 8-24V
Weight	635g (non-cooled); 915g (cooled)
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35°C (95°F)

*Refer to QImaging website for detailed listing of supported operating systems.
 Note: Specifications are nominal and subject to change.

04-0003C-F

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.



Tel 604.708.5061 ■ Fax 604.539.1825 ■ info@qimaging.com
www.qimaging.com